


PCG-FRV25Q

SERVICE MANUAL


*For American Area
Quebec Model*

Ver 1-2003G

Revision History

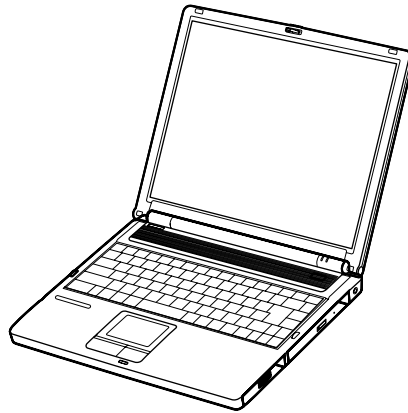

Lineup : PCG-FRV25Q

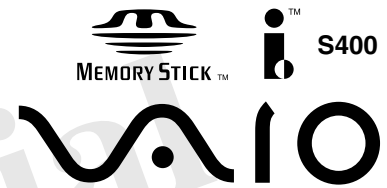

Confidential

- Design and specifications are subject to change without notice.

NOTEBOOK COMPUTER

SONY®

Information in this document is subject to change without notice.

Sony, VAIO and CLIE are trademarks or registered trademarks of Sony. Microsoft, Windows, Windows Media, Outlook, Bookshelf and other Microsoft products are trademarks or registered trademarks of Microsoft Corporation in the United States and other countries. The word Bluetooth and the Bluetooth logo are trademarks of Bluetooth SIG, Inc. AMD, the AMD logo, other AMD product names and combinations thereof are trademarks of Advanced Micro Devices, Inc. Intel Inside logo, Pentium and Celeron are trademarks or registered trademarks of Intel Corporation. Transmeta, the Transmeta logo, Crusoe Processor, the Crusoe logo and combinations thereof are trademarks of Transmeta Corporation in the USA and other countries. Graffiti, HotSync, PalmModem, and Palm OS are registered trademarks, and the HotSync logo and Palm are trademarks of Palm, Inc. or its subsidiaries. (M) and Motorola are trademarks of Motorola, Inc. Other Motorola products and services with (R) mark like Dragomall are the trademarks of Motorola, Inc.

All other names of systems, products and services in this manual are trademarks or registered trademarks of their respective owners. In this manual, the (TM) or (R) mark are not specified.

Caution Markings for Lithium/Ion Battery - The following or similar texts shall be provided on battery pack of equipment or in both the operating and the service instructions.

CAUTION: Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer. Discard used batteries according to the manufacturer's instructions.

CAUTION: The battery pack used in this device may present a fire or chemical burn hazard if mistreated. Do not disassemble, heat above 100°C (212°F) or incinerate.

Dispose of used battery promptly.

Keep away from children.

CAUTION: Changing the back up battery.

- Overcharging, short circuiting, reverse charging, multilation or incineration of the cells must be avoided to prevent one or more of the following occurrences; release of toxic materials, release of hydrogen and/or oxygen gas, rise in surface temperature.
- If a cell has leaked or vented, it should be replaced immediately while avoiding to touch it without any protection.



Service and Inspection Precautions

1. Obey precautionary markings and instructions

Labels and stamps on the cabinet, chassis, and components identify areas requiring special precautions. Be sure to observe these precautions, as well as all precautions listed in the operating manual and other associated documents.

2. Use designated parts only

The set's components possess important safety characteristics, such as noncombustibility and the ability to tolerate large voltages. Be sure that replacement parts possess the same safety characteristics as the originals. Also remember that the Δ mark, which appears in circuit diagrams and parts lists, denotes components that have particularly important safety functions; be extra sure to use only the designated components.

3. Always follow the original design when mounting parts and routing wires

The original layout includes various safety features, such as inclusion of insulating materials (tubes and tape) and the mounting of parts above the printer board. In addition, internal wiring has been routed and clamped so as to keep it away from hot or high-voltage parts. When mounting parts or routing wires, therefore, be sure to duplicate the original layout.

4. Inspect after completing service

After servicing, inspect to make sure that all screws, components, and wiring have been returned to their original condition. Also check the area around the repair location to ensure that repair work has caused no damage, and confirm safety.

5. When replacing chip components...

Never reuse components. Also remember that the negative side of tantalum capacitors is easily damaged by heat.

6. When handling flexible print boards...

- The temperature of the soldering-iron tip should be about 270°C.
- Do not apply the tip more than three times to the same pattern.
- Handle patterns with care; never apply force.

Caution: Remember that hard disk drives are easily damaged by vibration. Always handle with care.

ATTENTION AU COMPOSANT AYANT RAPPORT À LA SÉCURITÉ!

LES COMPOSANTS IDENTIFIÉS PAR UNE MARQUE Δ SUR LES DIAGRAMMES SCHÉMATIQUES ET LA LISTE DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ DE FONCTIONNEMENT. NE REMPLACER CES COMPOSANTS QUE PAR DES PIÈCES SONY DONT LES NUMÉROS SONT DONNÉS DANS CE MANUEL OU DANS LES SUPPLÉMENTS PUBLIÉS PAR SONY.


TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
CHAPTER 1. BLOCK DIAGRAM		1-1
		(to 1-2)
CHAPTER 2. FRAME HARNESS DIAGRAM		2-1
		(to 2-2)
CHAPTER 3. EXPLODED VIEWS AND PARTS LIST		3-1
3-1.	Main Section	3-2
3-2.	LCD Section – Made by HI –	3-5
		(to 3-6)
CHAPTER 4. OTHERS		
4-1.	Replacing the CPU	4-1
1.	Removing the CPU	4-1
2.	Installing the CPU	4-1

History of the changes is shown as the
“Revision History” at the end of this data.


CHAPTER 1.

BLOCK DIAGRAM

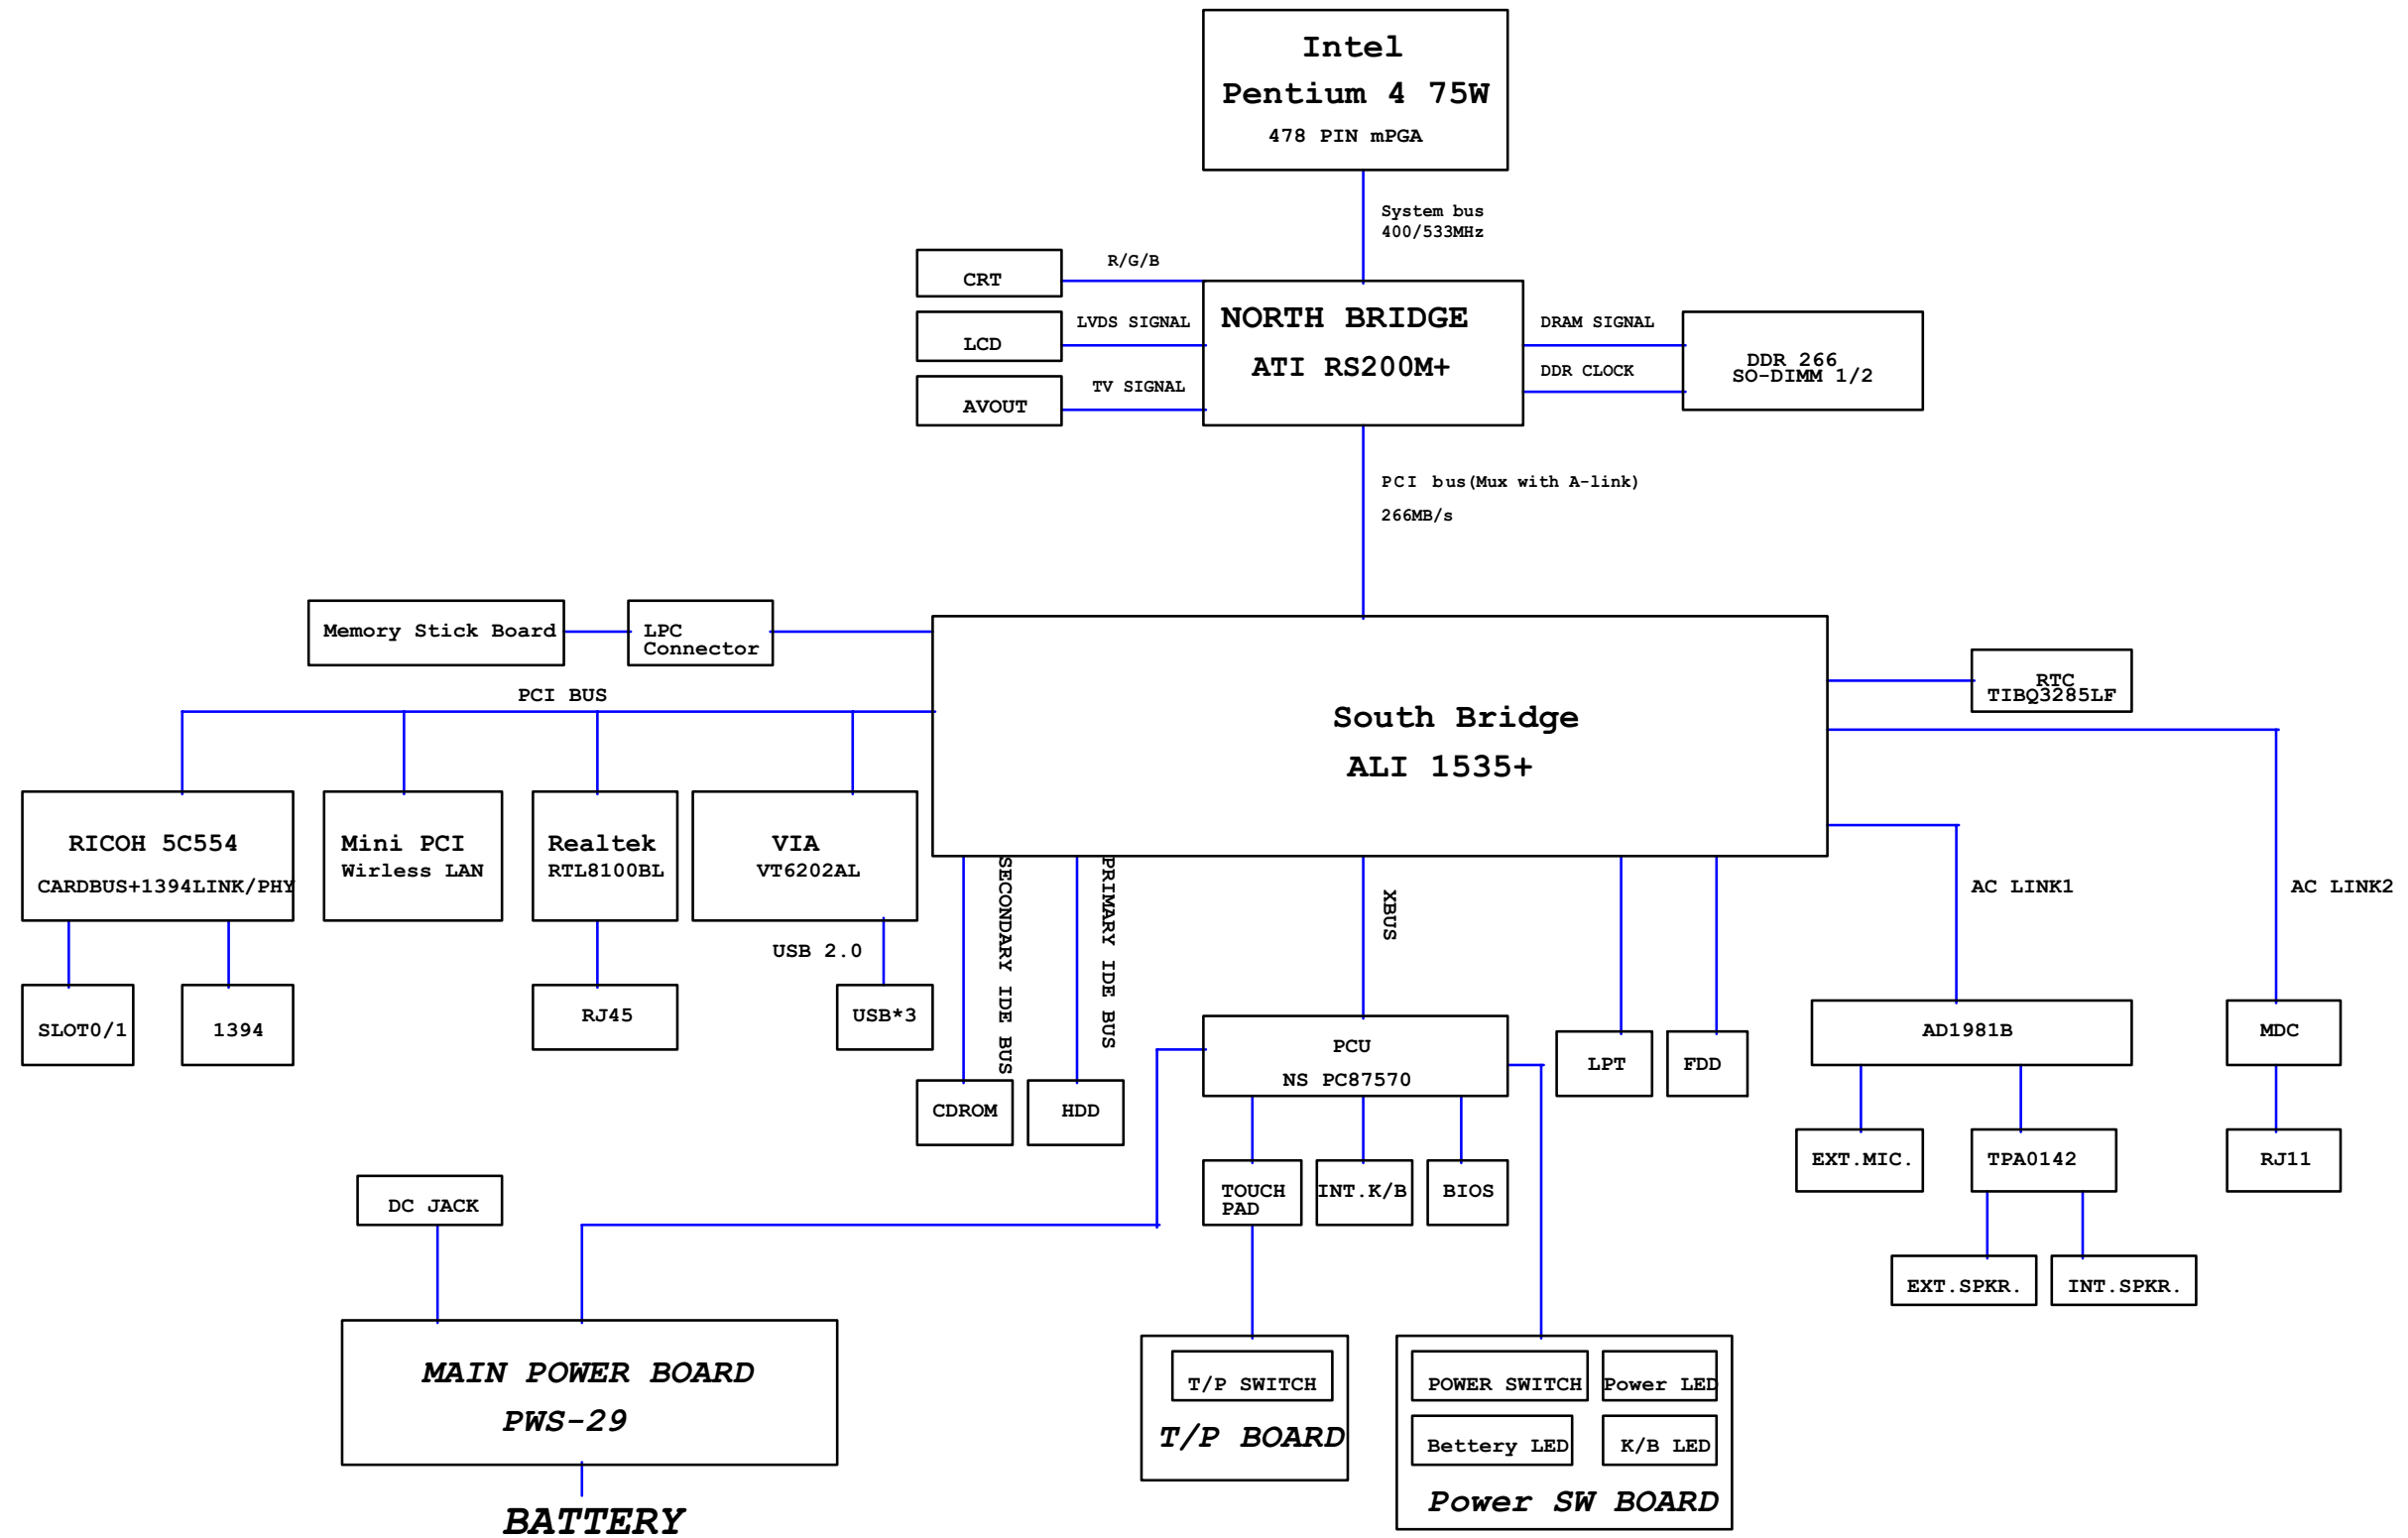

CHAPTER 2.

FRAME HARNESS DIAGRAM

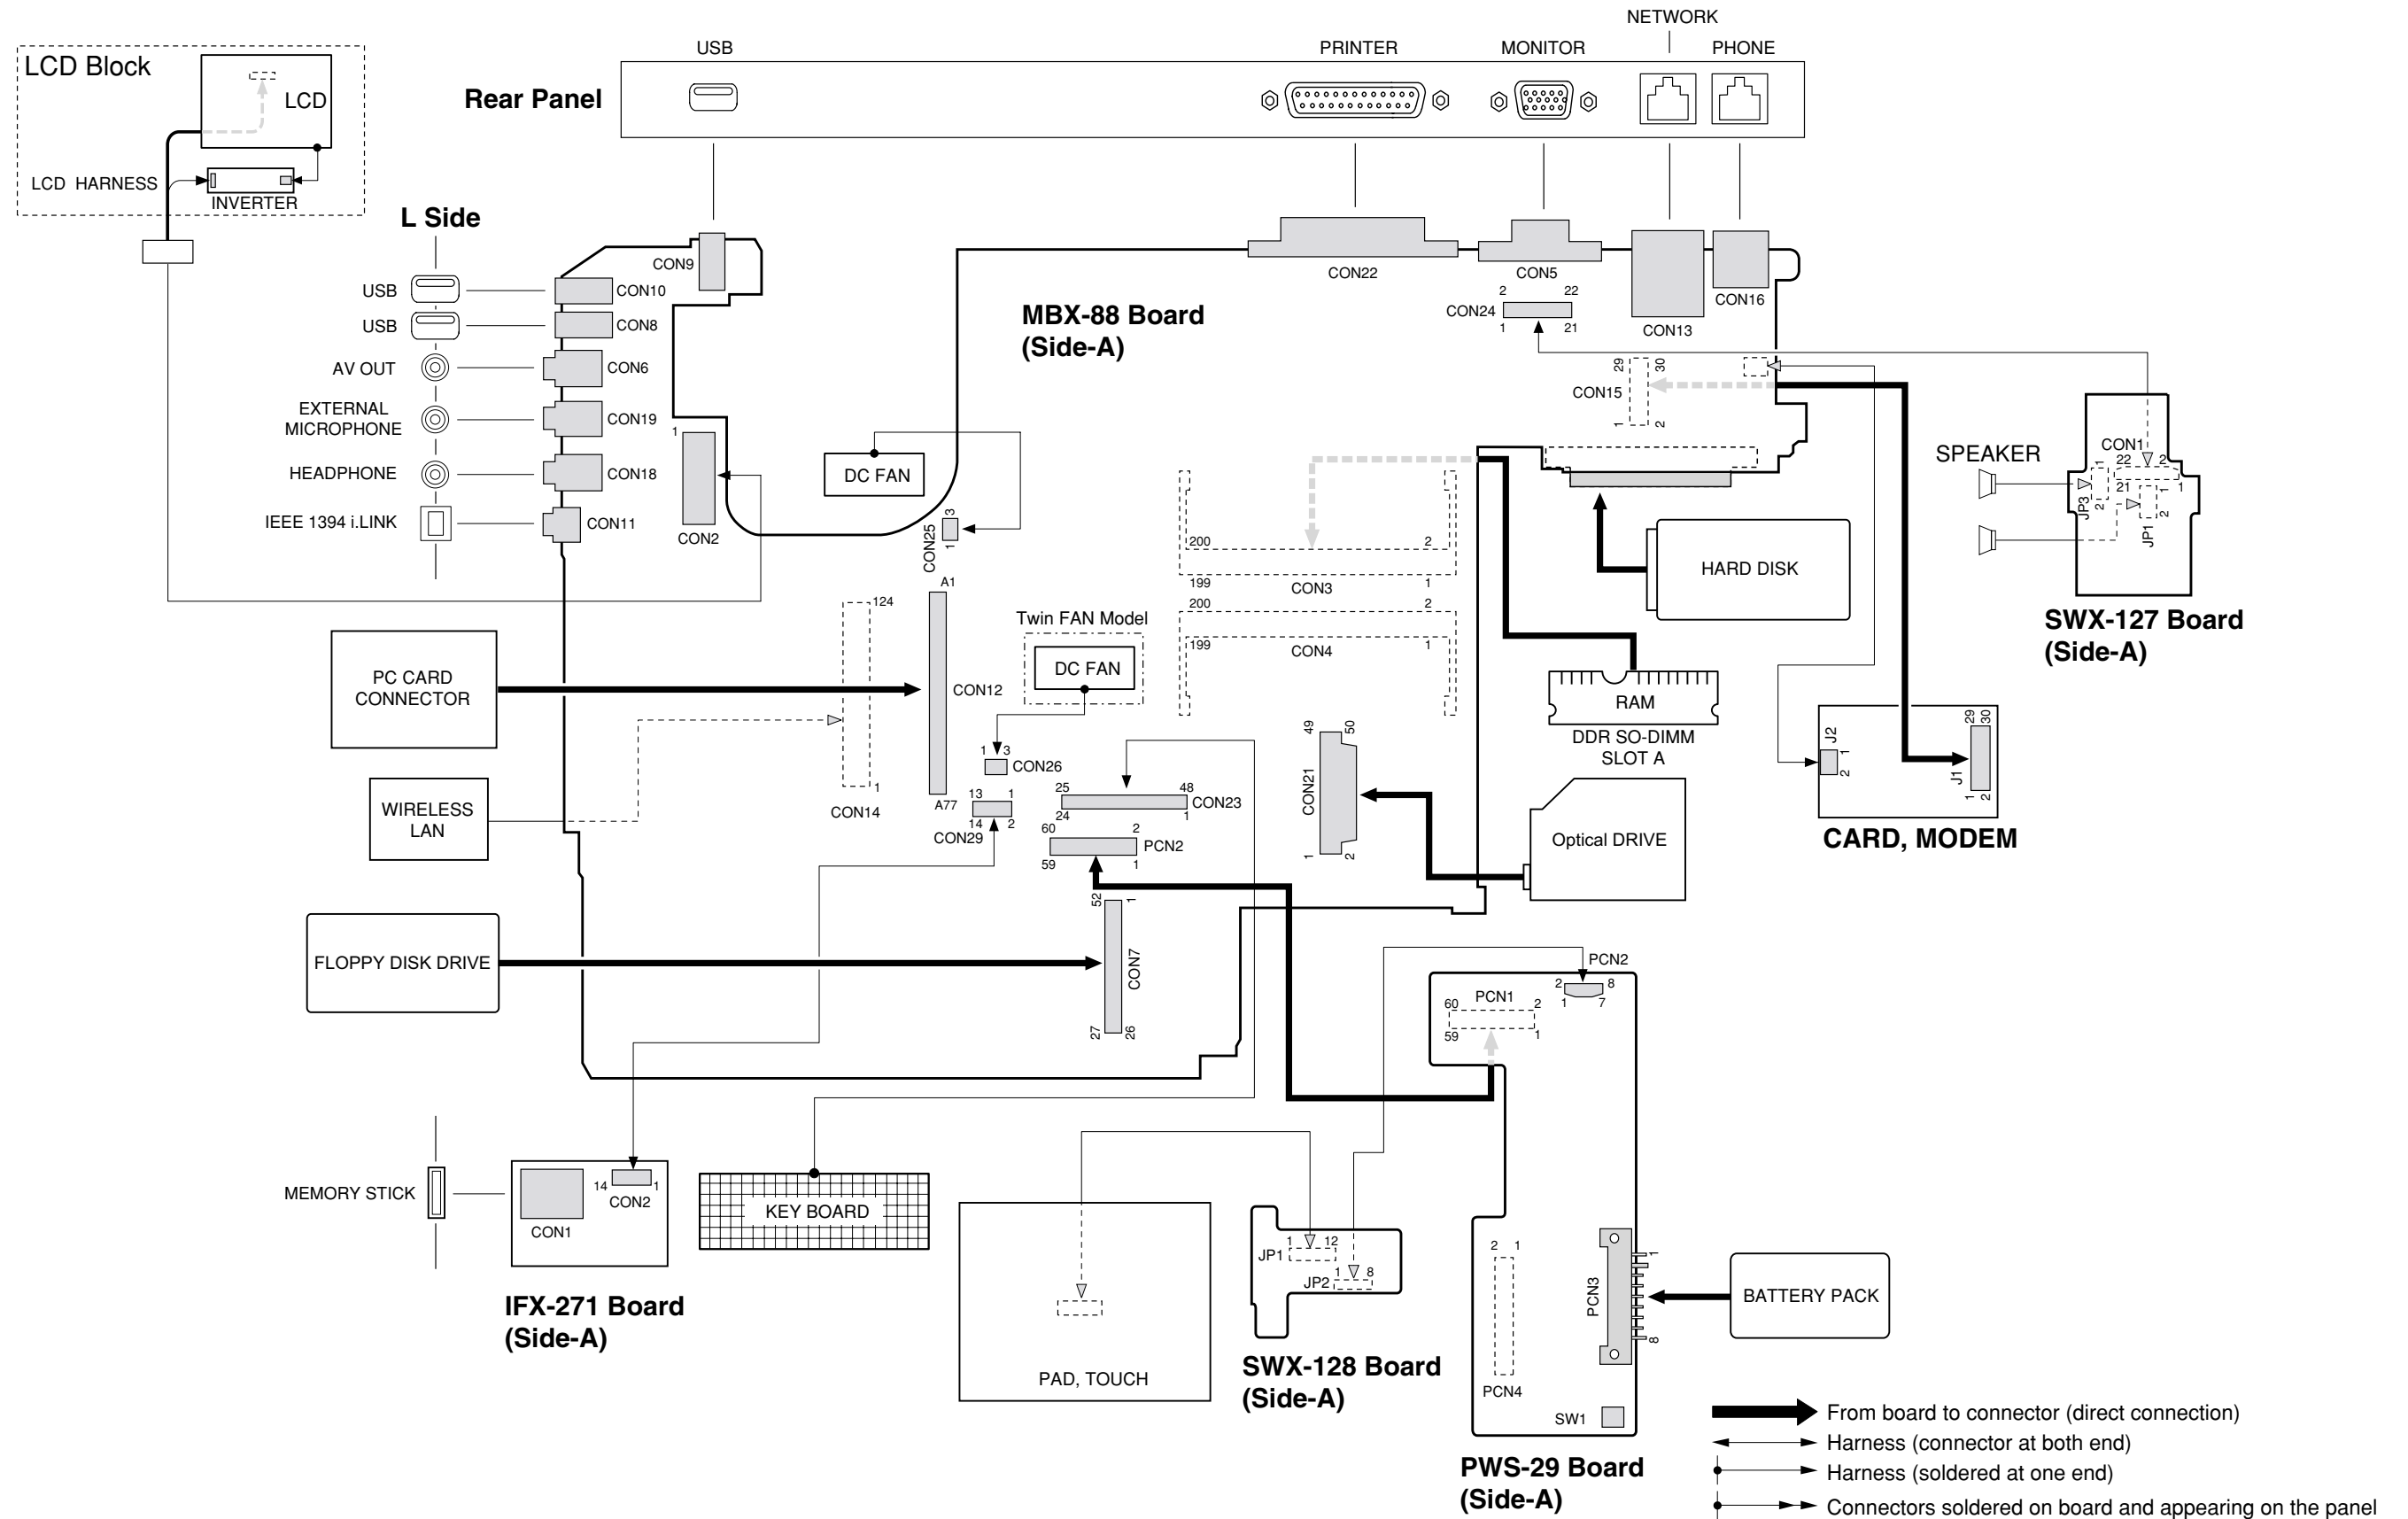

CHAPTER 3.

EXPLODED VIEWS AND PARTS LIST

NOTE:

- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- The mechanical parts with no reference number in the exploded views are not supplied.
- When two or more parts are shown, use the part described first as the main part.
- The parts marked “\$” are the High Value Modules (HVM).
- The parts marked “#” are the parts on which barcode label is attached.
- The parts marked “&” are the “Customer Replacable Parts (CRP)” that can be replaced by Field Customer Support.
Especially the parts with the <&> mark require the special attention to use them. Here fore, check first whether the desired part is one of the targetted parts of the Customer Replaceable Parts(CRP), or the non-targetted parts by referring to the exploded view.
- Regarding the boards of this model, the discrete parts on the boards cannot be replaced. However, Some connectors can be replaced.

The components identified by mark $\triangle$ or dotted line with mark $\triangle$ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque $\triangle$ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

【使用上の注意】


- *印の部品は常備在庫しておりません。
- 図面番号のない部品は供給しません。
- 併記部品の場合、上部記載部品をメイン部品として使用してください。
- 部品名称の前に\$印のついた部品は、High Value Module (HVM) です。
- 商品名称の前に#印のついた部品は、バーコードラベル貼付部品です。
- 部品名称の前に&印のついた部品は、お客様窓口などでも交換可能な Customer Replacable Parts (CRP) です。
特に<&>印のついた部品は、使い分けが必要な部品ですので、分解図で Customer Replacable Parts 対象部品か、対象外部部品かを必ず御確認ください。
- 本モデルの基板については、基板上の各部品の修理は行うことができません。ただし、一部のコネクタについては、修理可能です。

$\triangle$ 印の部品、または $\triangle$ 印付きの点線で囲まれた部品は、安全性を維持するために重要な部品です。従って交換時は、必ず指定の部品を使用してください。

3-1. Main Section


Ref.No.	Part No.	Description	Ref.No.	Part No.	Description
1	4-677-632-01	INSULATOR BOTTOM	61	4-670-194-01	COVER HOOD
2	6-600-158-01	IC HYS64D32020GDL-7-B (DDR DIMM 256MB)	* 62	4-676-348-01	BRACKET DC
2	6-600-116-01	IC M470L3224DT0-CB0 (DDR DIMM 256MB)	* 63	4-674-019-01	PLATE DC
* 10	4-674-025-01	BRACKET KEYBOARD	* 64	4-674-018-01	BRACKET IO
12	4-677-636-01	INSULATOR PC CARD	66	4-668-785-01	THERMAL SHEET CPU
13	1-761-695-11	NE5.1 PC CARD(EJECTER)	67	4-677-635-01	INSULATOR PWS
15	6-704-132-01	IC RK80532PE067512SL6S3 (P4 2.66GHz)	68	4-673-303-01	SPACER TOUCHPAD BUTTON
16	A-8068-048-A \$ #	COMPLETE PWB MBX-88	69	A-8068-050-A \$	COMPLETE PWB PWS-29
17	1-756-148-11	SECONDARY, BATTERY, LITHIUM	71	1-827-606-11	JE1.1 DC CABLE (INT)
18	1-761-606-14 #	CARD, MODEM	72	A-8068-051-A \$	COMPLETE PWB IFX-271
19	1-827-193-11	NE5.1 CABLE(MDC-MBX)	73	4-677-639-01	GASKET USB
20	1-827-605-11	JE1.1 FFC(PWR)	74	4-677-637-01	CUPPER TAPE
21	4-676-839-21 \$	ID LABEL CA	75	4-672-852-01	SHEET HDD
22	X-4626-183-1	HOOD KEYBOARD ASSY (S)	76	4-672-855-01	GASKET SPEAKER
23	1-825-426-11	NE5.1 SPEAKER	77	1-860-222-11	JE1.1 FPC (MS)
24	4-644-357-01	CUSHION SPK	78	4-672-858-01	SHEET BRACKET TOUCHPAD
25	4-654-631-01	GUARD SPK	79	4-674-041-01 &	FOOT REAR
26	4-671-631-01	BRACKET SPEAKER	81	4-672-849-01	GASKET LAN
27	4-674-042-01	MEMORY STICK WINDOW	82	4-671-635-01 &	FOOT
28	1-825-427-11	NE5.1 SPEAKER(R)	* 83	4-674-030-01	GUIDE DRIVE
29	A-8068-379-A \$	COMPLETE PWB SWX-141	84	A-8115-824-A \$	ASSY COOLING UNIT (DTP) (S)
30	4-670-198-01	ESCUSHION TOUCHPAD	85	4-673-615-01	GASKET SPEAKER R
31	1-796-319-31	PAD, TOUCH	86	4-677-536-01 &	SHEET RUBBER JE1
32	4-672-077-01	ADHESIVE TAPE TP	88	4-677-647-01	INSULATOR DRIVE
* 33	4-674-023-01	BRACKET PALMREST L	89	4-677-259-01	SPRING DRIVE L
34	1-478-147-11 \$ #	KEY BOARD UNIT (CA)	91	4-675-126-01	CAP FDD
35	4-671-634-01 &	CUSHION PALMREST	* 92	4-676-347-01	BRACKET DUMMY FDD
36	X-4626-182-1	HOUSING PALMREST ASSY (S)	94	4-673-304-01	SPACER PC CARD
* 37	4-674-022-01	BRACKET PALMREST R	95	9-885-029-05	CONNECTOR, USB(A)
38	A-8068-049-A \$	COMPLETE PWB SWX-140	B1	4-216-272-01	SCREW (M2), +
39	1-827-189-11	NE5.1 FFC(TP)	B2	4-635-966-01	SCREW (HEX)
40	1-827-192-11	NE5.1 FFC(PWS-TP)	B3	4-641-726-12	<&> SCREW (M2), SPECIAL HEAD
* 41	4-674-024-01	BRACKET TOUCHPAD	B4	4-641-726-41	SCREW (M2), SPECIAL HEAD
* 42	4-674-028-01	BRACKET DRIVE R	B5	4-644-637-01	<&> GRIP, M2 EG
43	X-4626-113-1	ASSY QSI COMBO BEZEL	B6	4-644-637-42	GRIP, M2 EG
44	1-796-627-11 \$ #	COMBO DRIVE (SEW-241)	B10	4-665-205-01	<&> SPECIAL FLAT HEAD (EG GRIP), M2
45	4-670-244-01	SPRING DRIVE R	B11	4-673-018-02	SCREW SPECIAL HEAD
* 46	4-674-029-01	BRACKET (DRIVE) (L)	B12	4-673-019-01	SCREW +B
* 47	4-674-033-01	BRACKET HDD	B13	4-673-121-01	SCREW PWS
48	A-8113-859-A \$ #	ASSY HDD 40GB (H) (S)	B14	4-673-655-01	& SCREW +B
49	4-673-851-01	& COVER HDD	B15	4-650-481-01	& SCREW(B1.7), TAPPING
50	4-677-197-01	& FOOT FRONT			
51	X-4626-185-1	& COVER MEMORY ASSY (S)			
53	X-4626-186-1	& COVER MINIPCI ASSY (S)			
55	X-4626-181-1	HOUSING BOTTOM ASSY (S)			
56	4-670-193-01	LENS FDD			
57	4-677-640-01	CUSHION HDD			
58	4-671-645-01	& DOOR BATTERY SPRING			
59	4-673-853-01	& DOOR BATTERY			
60	4-673-852-01	& COVER MODEM			

Confidential

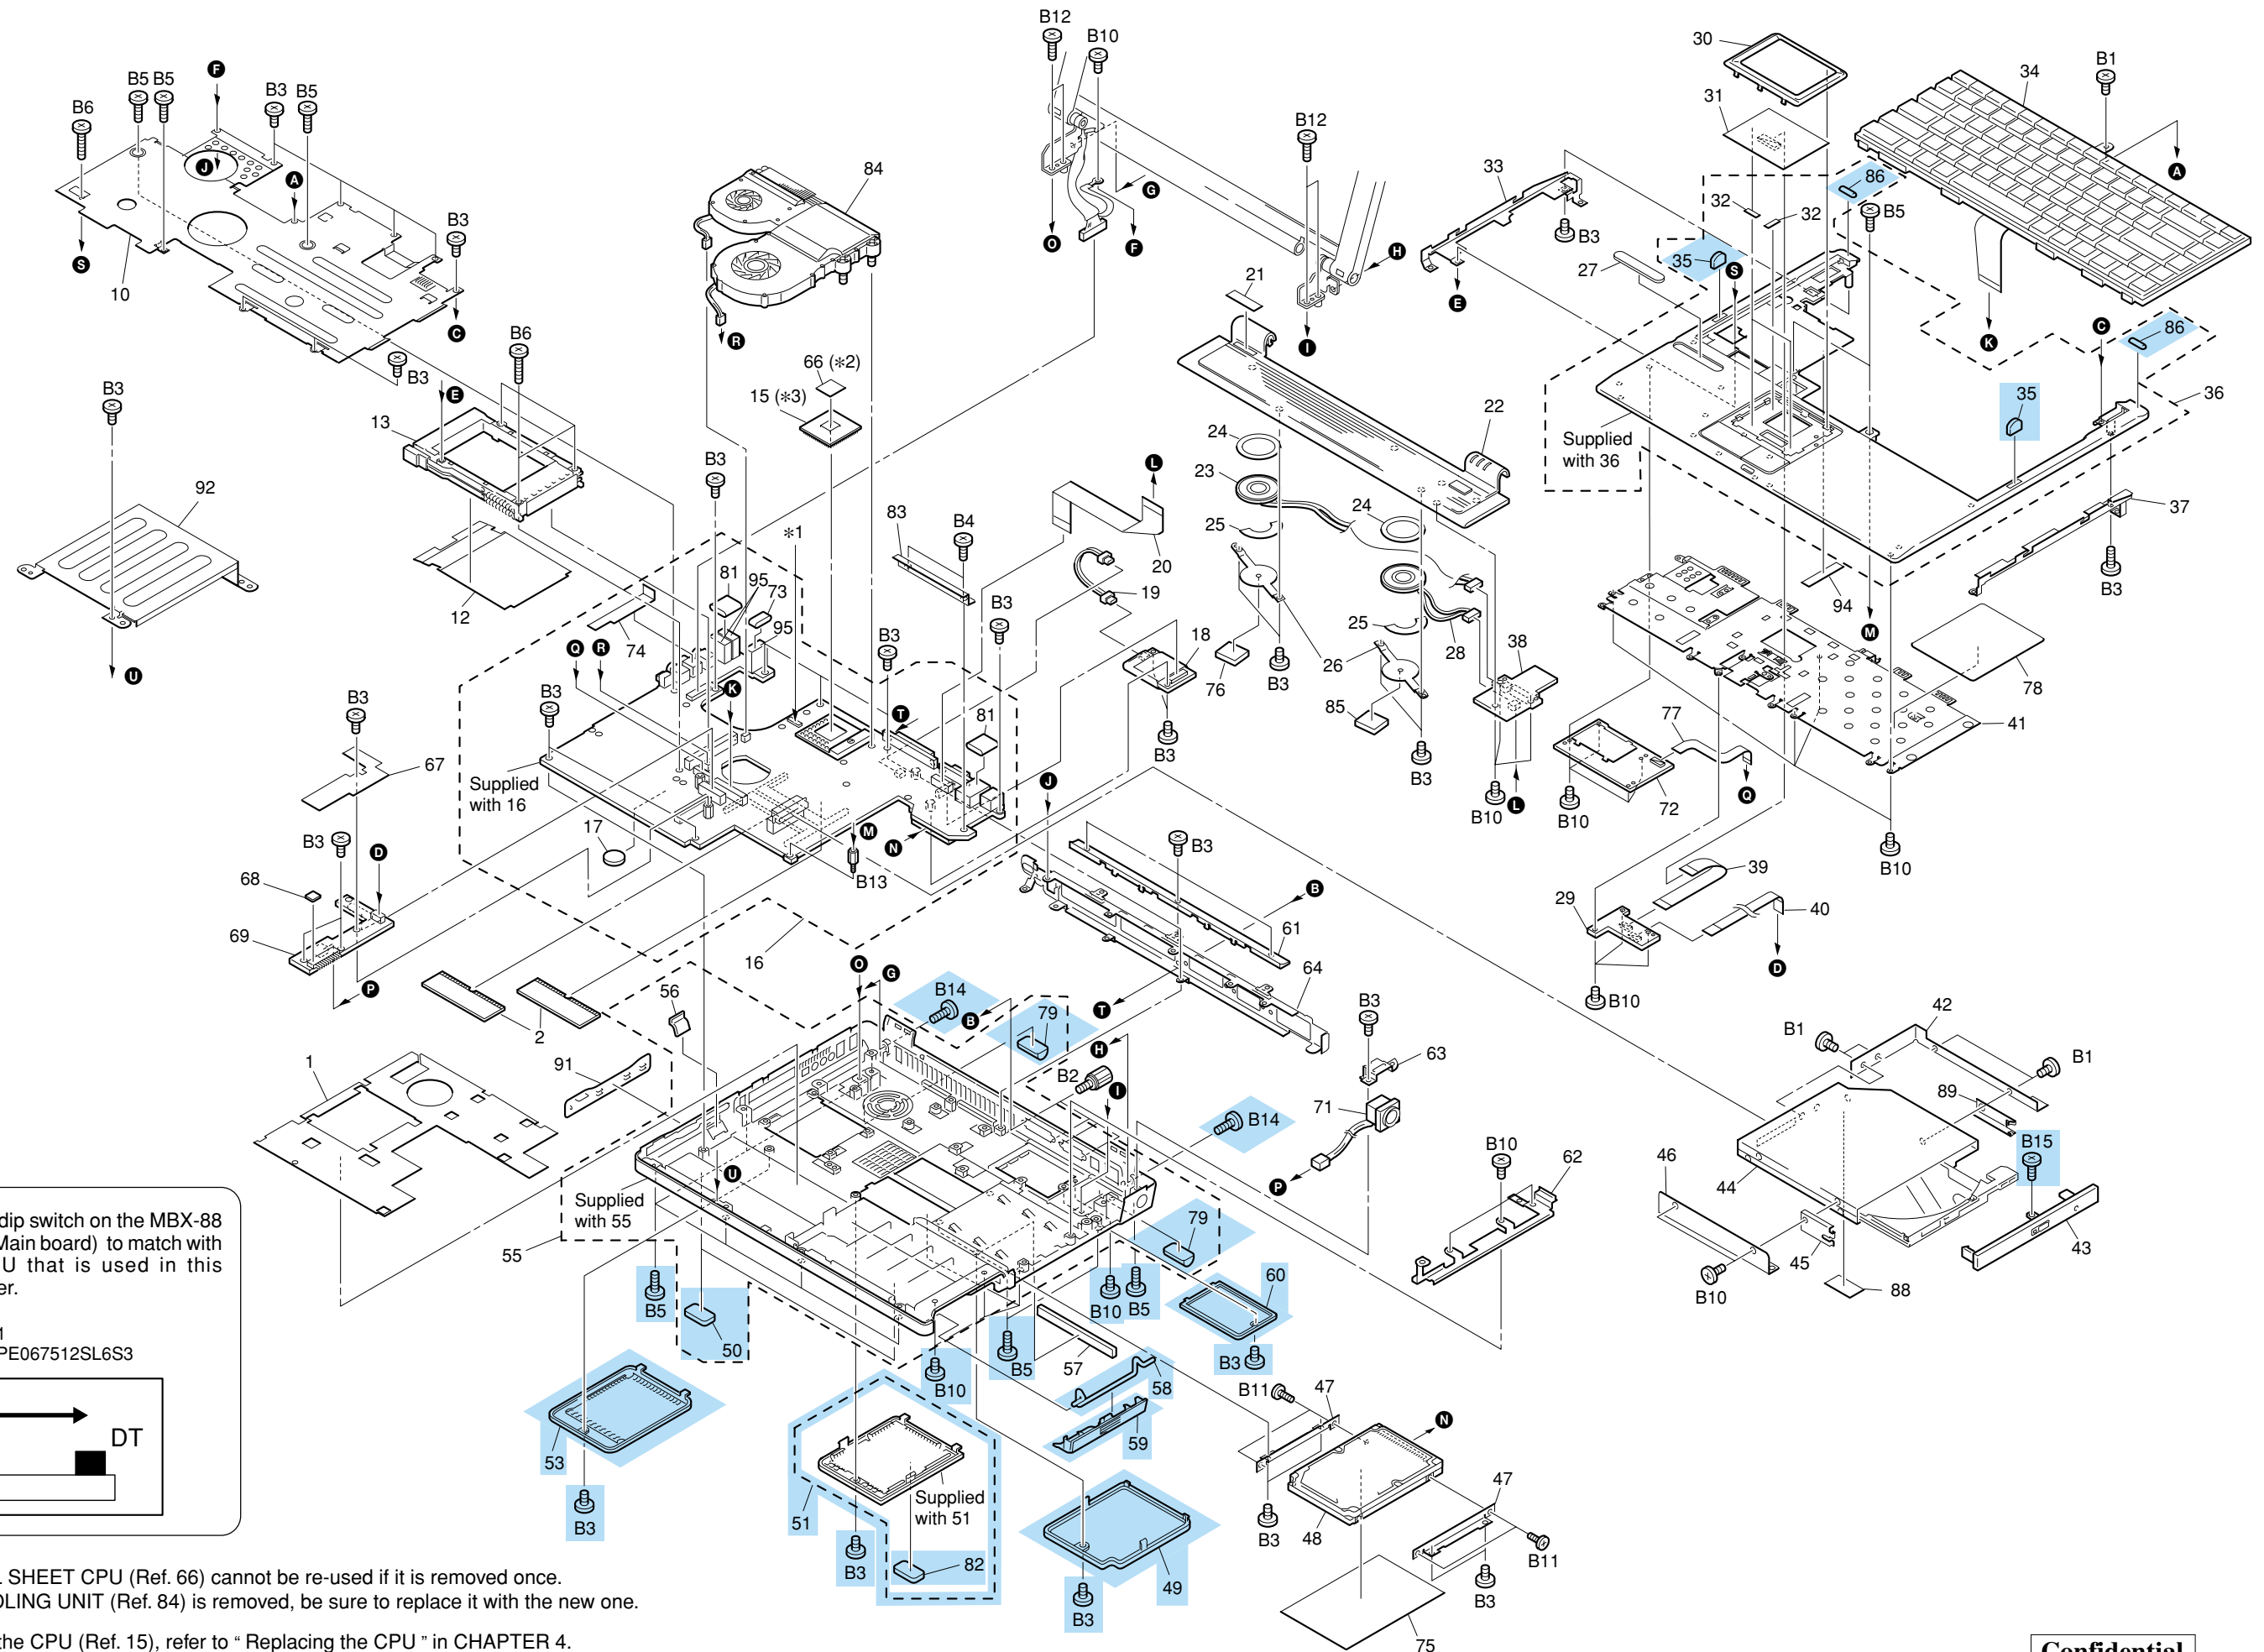

***1 NOTE :** Set the dip switch on the MBX-88 board (Main board) to match with the CPU that is used in this computer.


CPU: 6-704-132-01
IC RK80532PE067512SL6S3



***2** The THERMAL SHEET CPU (Ref. 66) cannot be re-used if it is removed once.
When the COOLING UNIT (Ref. 84) is removed, be sure to replace it with the new one.

***3** When change the CPU (Ref. 15), refer to "Replacing the CPU" in CHAPTER 4.


3-2. LCD Section – Made by HI –

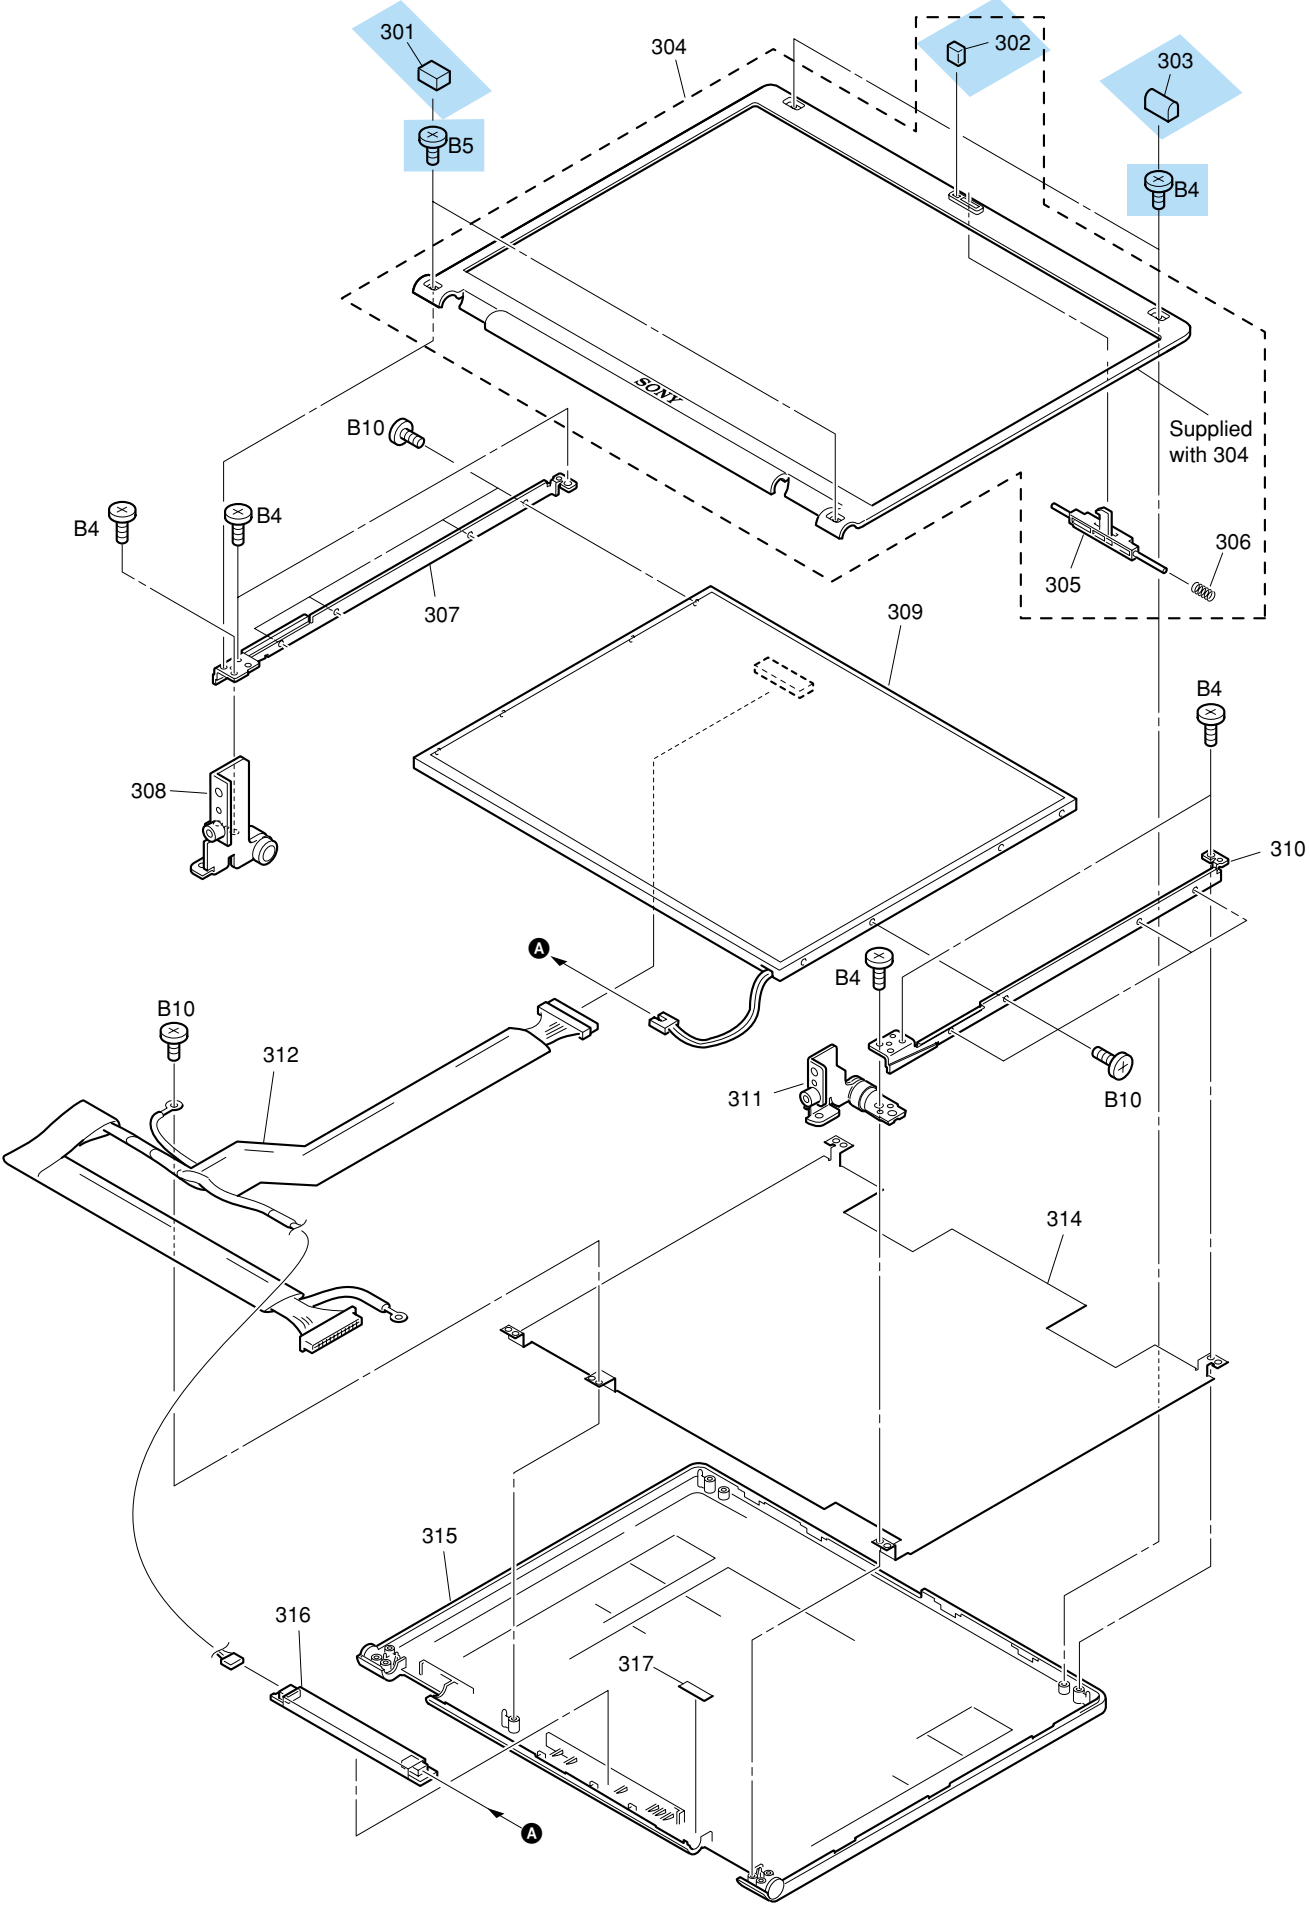

Ref.No.	Part No.	Description
301	4-671-639-01	& CUSHION HINGE
302	4-671-637-01	& CUSHION LATCH
303	4-671-638-01	& CUSHION LCD
304	X-4625-822-1	BEZEL DISPLAY ASSY(15) (S)
305	4-670-228-01	BUTTON LATCH LCD
306	4-671-640-01	SPRING LATCH LCD
* 307	4-671-454-01	BRACKET LCD L (15)
308	4-671-457-01	HINGE L
309	A-8113-852-A	\$ # ASSY LCD 15(H) GT2 (S)
* 310	4-671-453-01	BRACKET LCD R (15)
311	4-671-456-01	HINGE R
312	1-962-514-11	LCD HARNESS
314	4-671-636-01	LCD SHIELDING
315	X-4625-820-1	HOUSING DISPLAY ASSY(S)
316	1-476-317-21	INVERTER UNIT
317	4-673-299-01	INVERTER TAPE
B4	4-641-726-41	<& SCREW (M2), SPECIAL HEAD
B5	4-644-637-01	& GRIP, M2 EG
B10	4-665-205-01	SPECIAL FLAT HEAD (EG GRIP),M2

NOTE :

Set the DIP switch on the MBX-88 board (Main board) to match with the LCD that is used in this computer.




The upper position where ON indication is shown is the ON position . The lower position is the OFF position.

No.	1	2	3	4	5	6
ON/OFF	1	1	1	0	1	1
0 : ON 1: OFF						


Ref.No.	Part No.	Description
ACCESSORIES		

△801	1-478-037-12	\$ & ADAPTOR, AC
802	A-8112-427-A	\$ # & BP2NX SNT (U) ASSY (S)
△803	1-757-562-21	& CORD, POWER
	4-676-759-01	\$ & SPECIFICATIONS SHEET (2670QAX)
	4-676-793-01	\$ & QUICK START 2670QAX

801
AC Adaptor



803
Power Cord



802
Battery Pack




The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque △ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

4-1. Replacing the CPU


1. Removing the CPU

- ① Insert a flat-blade screwdriver into the notch as shown in the illustration and rotate it so that the protrusion comes to the lock release position.
- ② Pull the CPU gently upward to lift it out of the CPU socket.

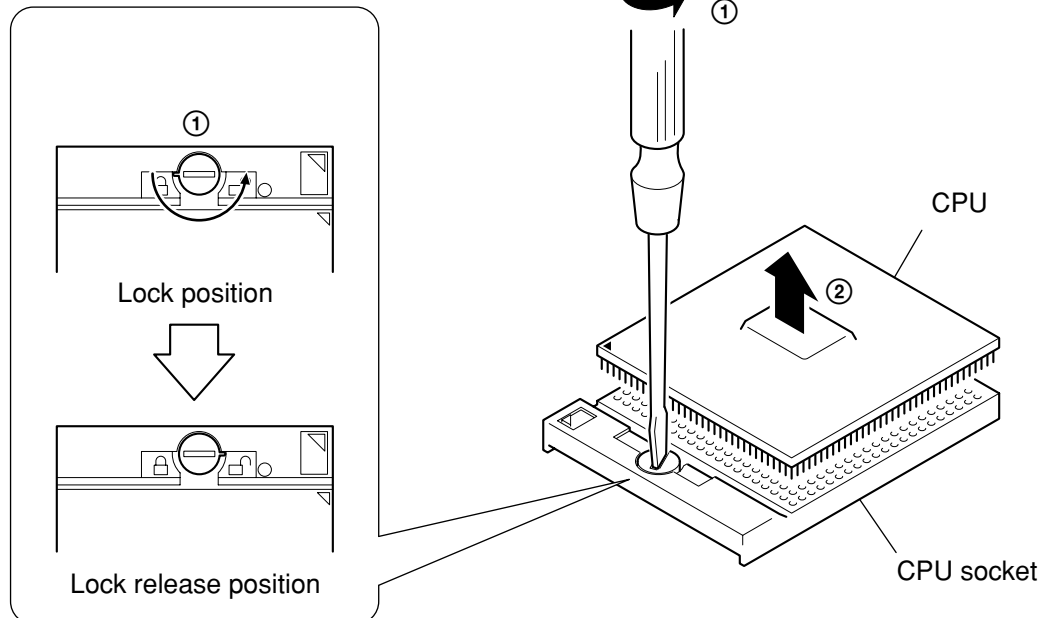

2. Installing the CPU

- ① Align the triangle reference mark of the CPU with that of the CPU socket and insert all the pins of the CPU to the corresponding holes of the CPU socket.
- ② While pressing the two positions marked by ○, insert the flat head (-) screwdriver into the specified position and rotate the screwdriver to the LOCK position.

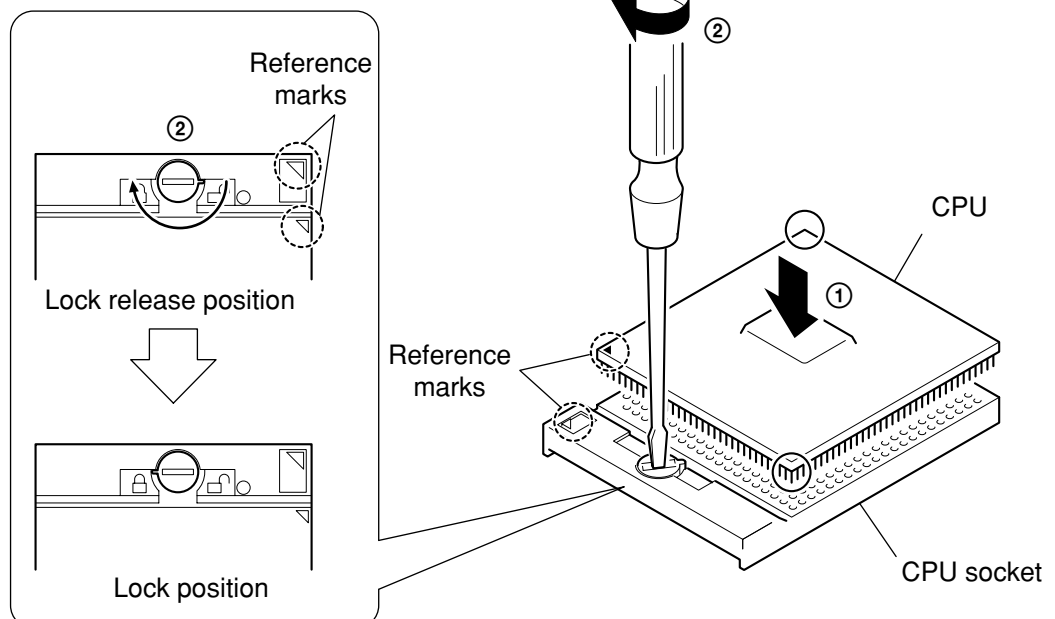

NOTE:

Rotate a flat-blade screwdriver to the lock position securely. If not, the operation of the CPU may become unstable.

List of PCG-FR Series (As of July, 2003)

Model Name	Service Manual Part No.
PCG-FR130	9-876-046-02
PCG-FR780	9-876-048-01
PCG-FRV23	9-876-304-02
PCG-FRV25	
PCG-FRV27	
PCG-FR860	9-876-305-01
PCG-FR862	
PCG-FRV25Q	

 : Additional Models

This manual and the constituent data may not be replicated, copied nor reprinted in whole or in part without prior written authorization of Sony Corporation.

Revision History

Suffix	Ver.	Date	Contents	QM No.
-01	Ver. 1	2003.07.09	First Edition	
< Remarks >				